


Rapid Cross Connector

Mounting Instruction

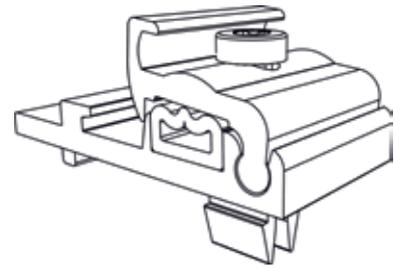

Required tool

Screw driver with bit tip holder
Bit T40






The Schletter tool kit contains the equipment required for all standard systems.




Tightening torques

M6 bolted connections: 8 Nm

- 1 Positioning cross connector**
- Hold cross connector perpendicular to rail and insert T-Anchor into the channel above the square nut.
 - Turn the connector by 90°.
 - Click the shaft of the Rapid-Anchor into the Klick channel.

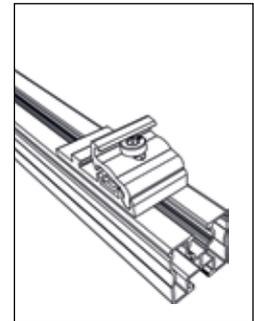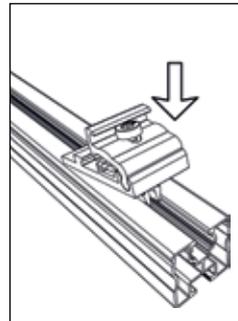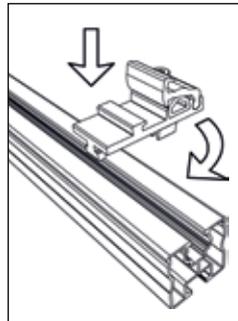

- 2 Securing the cross rail**
- Insert cross rail into cross connector.
 - Tighten bolt (bit T40)

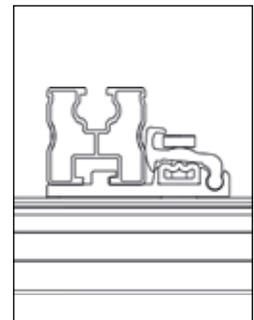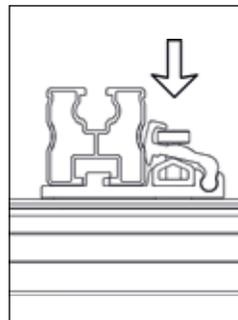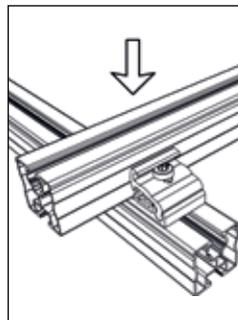

Safety instructions



Planning, mounting and start-up of the solar plant must be performed by qualified personnel only. Poor quality execution can result in damage to the plant and to the building and can present a risk to people.



Risk of falling! There is a risk of falling when working on the roof as well as when ascending and descending the building. Accident prevention regulations must be observed and appropriate safety equipment must be used. PV mounting systems are not suitable as climbing aids or fall protection.



Risk of injury! Objects falling from the roof can cause injury to people. The danger area around the installation site must be secured and people present in the area warned of the risks.

For further information relating to our systems, please refer to our website: www.schletter-group.com in the download area.